

RLM

The Sunnex RLM is a magnifying light with superior light intensity for detailed inspection. The magnification is 5 diopter (2.25X) and the light source is a 22W fluorescent ring light with low heat emission. The arm has adjustable joints for easy and safe positioning. Two versions are offered: a C-clamp (included) as well as a mobile version. Additionally, there is an option to add on a 2.25X lens. The Sunnex RLM is pure in style, easy to keep clean, and takes up little room.

Applications

Inspection work
Assembly work
Laboratories
Work benches


Benefits

Magnification at 2.25X
Adjustable joints in the arm
Adjustable lamp head
Low heat emission


Technical Specifications

Supply Voltage	120V/AC/50 Hz
Light Source	22W fluorescent ring tube
Lifetime, light source	15,000 hours
Lamp head	With joint
Lens	Matt
Arm length	34.5 inches
Color	White
Color temperature	4000K
Protection class	Class I
Power switch	Placed on the arm
Base	C-clamp or mobile floor unit
CRI	Ra 85
Cable length	1.8 m

Version	Connection	Lamp	Part Number
C-clamp	110V	22W	RLM-CL-120V
Mobile	110V	22W	RLM-CLT-120V
Add-on Lens			RLM-5XMAG

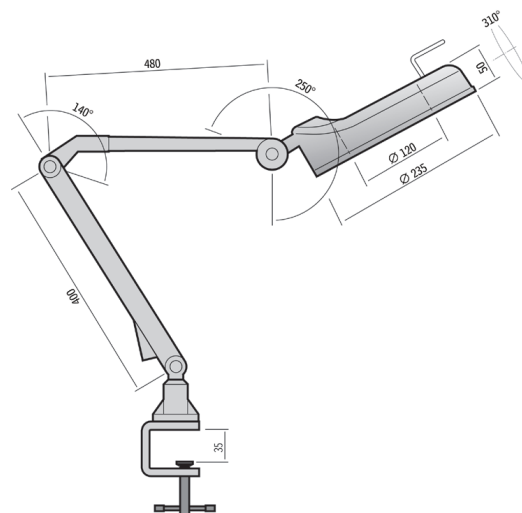

Lux rating - 0.15 m distance



Sunnex reserves the right to change this information without further notice and holds no liability for printing errors in this content.

Copyright © Sunnex, Inc. All Rights Reserved.