

# Leveling Mounts




## LL-Series

Sunnex LL leveling mounts are ideal for loads up to 4400 lbs. The LL series is fitted with a rubber pad designed to grip mounting surfaces, and has a solid base design.

The precision ball and socket design of the swivel connection provides a smooth low friction interface from the equipment to the floor. This deep socket joint prevents any debris from getting into the joint connection.

LL-Series Item number	Load Capacity (lbs)	Base Height, h (in)	Base Diameter, D (in)	Thread, d, L (in)
LL 10	2000	1.05	1.25	M12 – 1.75 x 75
LL 12	2500	1.15	1.75	M12 – 1.75 x 75
LL 20	4400	1.15	2.30	M14 – 2.0 x 100

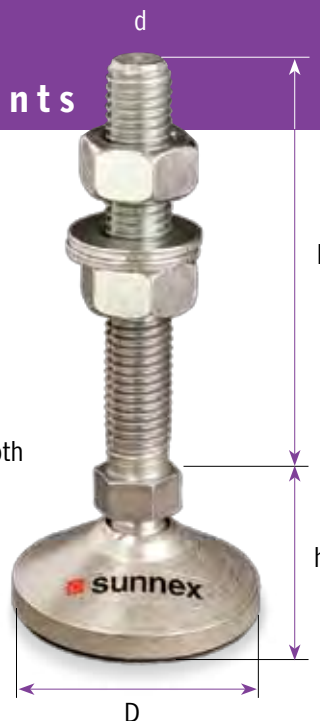

## LE-Series

The LE series consists of a rubber molding vulcanized onto a leveling bolt. The rubber molding has excellent friction on most any surface and provides a safe and dependable installation.

The minimal stud length is well suited for both open hole and blind hole applications. Each model comes complete with a nut and washer for leveling and locking in place.

Standard rubber molds are gray in color, however most are also available in a high durometer black rubber for heavy loads.

LE Series Item Number	Load Capacity (lbs)	Base Diameter, D (in)	Base Height, h (in)	Thread Height, L (in)	Thread Type, d (in)
LE 19-1*	90	1.81	0.59	1.50	M10 x 1.5
LE 19-2*	90	1.81	0.59	2.36	M10 x 1.5
LE 19-3*	170	1.81	0.59	1.50	M10 x 1.5
LE 19-4*	170	1.81	0.59	2.36	M10 x 1.5
LE 108	130	1.81	0.31	2.24	M8 x 1.25
LE 213	130	1.18	0.28	1.50	M10 x 1.5
LE 259	75	1.18	0.39	1.10	M6 x 1.00

\*Base Material Stainless Steel (SS) or Zinc Plated (ZP)

## Applications

- Assembly Stations
- Outside Maintenance Equipment (Motors, Pumps)
- Woodworking Machines
- Compressors
- Small Machines
- Office and Household Machinery



See our Online Specifications:  
[www.sunnexmounts.com/mounts/LL.htm](http://www.sunnexmounts.com/mounts/LL.htm)  
[www.sunnexmounts.com/mounts/LE.htm](http://www.sunnexmounts.com/mounts/LE.htm)