

STAINLESS STEEL MACHINE FEET

TYPE H

Ultrahygienic model with covered transition between foot plate and thread.

The vulcanized rubber conforms with FDA standard guidelines for rubber products concerning the food-industry. With its rounded and hygienic design, this foot is easy to clean.

Admits up to 10° slopes on floors and equipment.



3.1


Ordering example:

H80 - 5/8" - 6"



Foot plate

	H 60	H 80	H 100	H 120	H 140
Diameter Ø	2.36"	3.15"	3.94"	4.72"	5.51"
Height B	1.22"	1.26"	1.42"	1.61"	1.69"
Nom. load	7.000 N	15.000 N	20.000 N	30.000 N	40.000 N

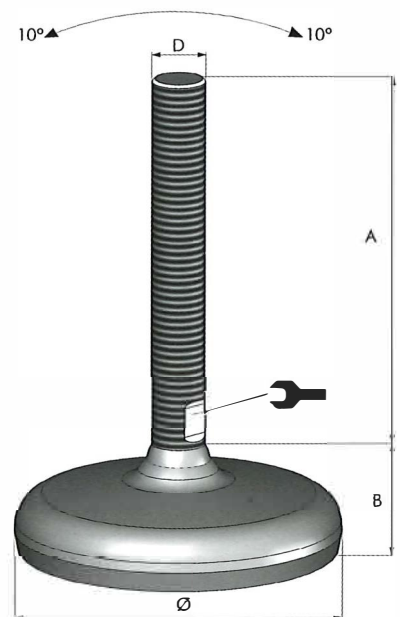

Foot plate and thread can be combined freely.

Thread

Length A*	D 1/2"UNC	D 5/8"UNC	D 3/4"UNC	D 7/8"UNC	D 1"UNC	D 1 1/4"UNC
3"	3,93	4,95	6,64	8,21	11,50	-
4"	4,45	5,90	8,16	10,39	14,65	20,44
6"	5,07	7,03	10,06	13,42	18,70	25,06
8"	5,43	7,98	11,52	15,26	22,10	29,98
10"	6,10	9,11	13,41	17,34	26,58	37,40
12"	-	11,07	16,00	20,95	31,18	45,89
	3/8"	1/2"	9/16"	5/8"	3/4"	1"

Prices are unit prices in \$.

* For exact A-dimensions, please see chapter 10.2